
CARABINER

STANDARD SELF LOCKING

CARABINER

Standard Self Locking Steel 1/4 in. (6.35 mm.) Turn

DXFP911001

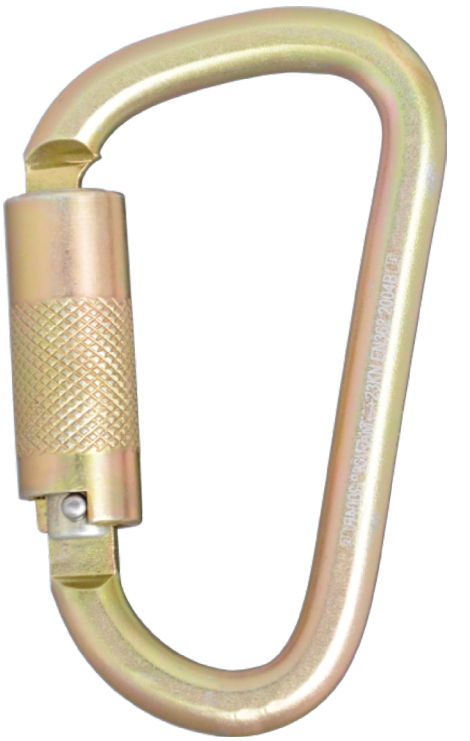

BENEFITS AND FEATURES

The DEWALT Quarter-Turn, Self-Locking, Bulb Style Steel Carabiner provides flexible solutions for connecting various fall protection equipment. With a .85 in (21.5mm) gate opening, the 3,600 lbs. (16kN) gate strength meets OSHA and ANSI standards for fall protection.

FLEXIBILITY: The large 0.85 in (21.5 mm) gate opening allows this carabiner to fit most applications.

DURABILITY: The galvanized alloy steel construction provides exceptional wear and weather resistance.

STRENGTH: Meets OSHA and ANSI standards for 3,600 lb. (16kN) gate. Minimum breaking strength 10,000 lbs (44.5kN).

SPECIFICATIONS

Maximum Breaking Strength: 10,000 lbs. (44.5 kN.)

Capacity: 310 lbs. (141 kg)

Size: 4.7 in. (119 mm.) Long, 2.7 in (69 mm.) Wide

Weight: 0.55 lbs. (250 gr.)

Material: Galvanized alloy steel with golden yellow/silver passivation

RELEVANT STANDARDS

Meets ANSI Z359.12-2019, OSHA 1926.502 and 1910.140

CAN/CSA Z259.12-16

WARNINGS

·Read, understand and follow all labels and instructions prior to use.
·Inspect before each use.
·Remove from service if there is evidence of damage or excessive wear.

WARRANTY

2 YEAR LIMITED WARRANTY

2026 DEWALT. DEWALT® and GUARANTEED TOUGH® are registered trademarks of DEWALT Industrial Tool Co. and used under license by DEWALT Fall Protection. All rights reserved. The yellow and black color scheme is a trademark for DEWALT power tool and accessories. A licensee of DEWALT Industrial Tool Co. www.dewalt.com Trademark Licensee: DFP Safety Corp. 20711 Holt Av. Suite 1525 Lakeville, MN 55044 www.dfpsafety.com