ANCHOR STRAP

CONCRETE ANCHOR

4 ft. (1.2 m) WEB ANCHOR STRAP-CHOKER


Large And Small D-Rings With Wear Pad

DXFP811004

BENEFITS AND FEATURES

The DEWALT 4 ft. (1.2 m) choker style web anchor strap provides a strong, durable and flexible temporary fall protection anchor solution in a compact and lightweight design.

DURABILITY: The 1-3/4 in. (4.4 cm) polyester webbing strength member with the 2-3/4 in. (6.9 cm) polyester webbing wear pad provides exceptional strength, wear, oil, dust and water protection.

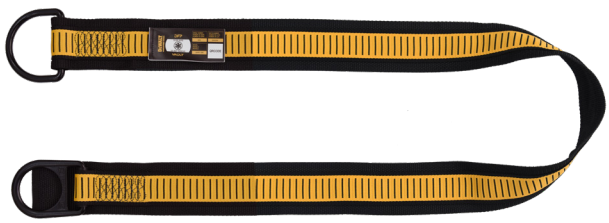

COMPACT AND LIGHTWEIGHT: Weighing only 1.31 lbs. (0.59 kg), this temporary anchor strap is easily moved and reused from location to location.

STRENGTH: Meets OSHA and ANSI standards of 5,000 lbs. (23 kN) anchor point.

FLEXIBILITY: Can be used as a vertical or horizontal temporary anchor point around beams, posts or other structural members.

SPECIFICATIONS

Length: 4 ft. (1.2 m)

Capacity: 310 lbs. (140) Kg

Breaking Strength: 5,000 lbs. (2267) kg

Materials of construction: Polyester, Steel

RELEVANT STANDARDS

Meets ANSI Z359.18-2017 Type T, OSHA 1926.502, 1910.140
CAN/CSA Z259.15-22

WARNINGS

·Read, understand and follow all labels and instructions prior to use.
·Inspect before each use.
·Remove from service if there is evidence of damage or excessive wear.

WARRANTY

2 YEAR LIMITED WARRANTY

2026 DEWALT. DEWALT® and GUARANTEED TOUGH® are registered trademarks of DEWALT Industrial Tool Co. and used under license by DEWALT Fall Protection. All rights reserved. The yellow and black color scheme is a trademark for DEWALT power tool and accessories. A licensee of DEWALT Industrial Tool Co. www.dewalt.com Trademark Licensee: DFP Safety Corp. 20711 Holt Av. Suite 1525 Lakeville, MN 55044 www.dfpsafety.com