ANCHOR

PARAPET ANCHOR


PARAPET ANCHOR

Adjustable Width 2.3 to 24.1 in.(6 - 36 cm.)

DXFP847001

BENEFITS AND FEATURES

The DEWALT Parapet anchor with extended movable arm which allows safety installation on the parapet with moulding on outer edge. Anchor suitable to be installed on the parapet of a building such that the anchor point lies at the top on the outside facade of the building. Suitable to be installed on varying thickness of the parapet. Width adjustment feature provided, tightening on to the parapet by use of rubber disks.

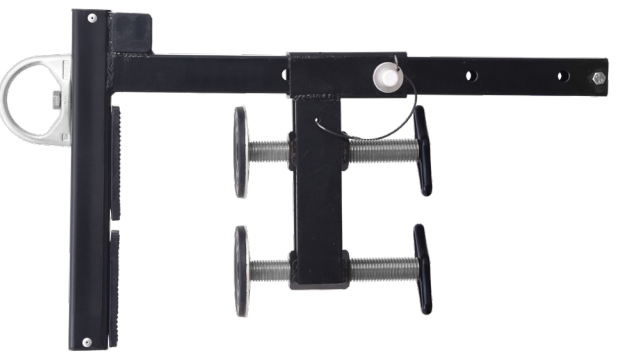

DURABILITY: The high strength alloy steel construction of the anchor provides exceptional strength for a long lasting, movable anchor point.

COMPACT AND LIGHTWEIGHT: Weighing only 21 lbs. (9.5 Kg), this parapet anchor is easily moved and reused from location to location.

STRENGTH: Meets OSHA and ANSI standards of 5,000 lbs. (23 kN) anchor point.

SPECIFICATIONS

Length: 22.7 in. (57.7 cm) - **Adjustable Width :** 2.3 - 24.1 in. (6 - 36 cm)

Capacity: 310 lbs. (140 Kg)

Breaking Strength: 5,000 lbs. (23 kN)

Materials of construction: High Strength Alloy Steel

RELEVANT STANDARDS

Meets ANSI Z359.18-2017 Type A, OSHA 1926.502, 1910.140

WARNINGS

·Read, understand and follow all labels and instructions prior to use.
·Inspect before each use.
·Remove from service if there is evidence of damage or excessive wear.

WARRANTY

2 YEAR LIMITED WARRANTY

2026 DEWALT. DEWALT® and GUARANTEED TOUGH® are registered trademarks of DEWALT Industrial Tool Co. and used under license by DEWALT Fall Protection. All rights reserved. The yellow and black color scheme is a trademark for DEWALT power tool and accessories. A licensee of DEWALT Industrial Tool Co. www.dewalt.com Trademark Licensee: DFP Safety Corp. 20711 Holt Av. Suite 1525 Lakeville, MN 55044 www.dfpsafety.com